


**SECTION**

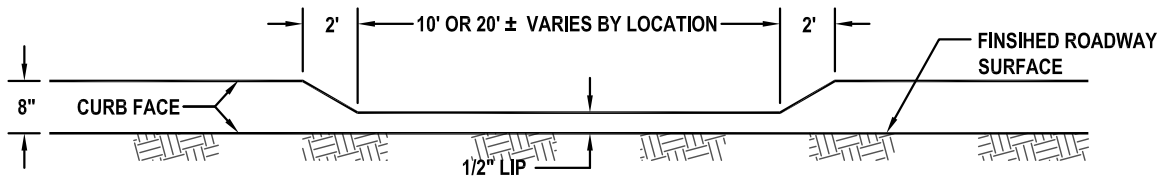

**CURB FACE ELEVATION**


**CONSTRUCTION NOTES:**

1. Strike control joints every 4'-0" and place expansion joints every 16'-0".
2. Install 1/2" preformed expansion joint material at all expansion joints and where sidewalk abuts concrete curb, foundations, aprons, or other concrete structures.
3. All concrete construction shown on these standard details shall use 3000 P.S.I. SHA Mix No. 2 concrete unless otherwise specified.
4. All storm drain structures shall be underlain with a minimum 6" clean crushed stone base.

APPROVED:

DIRECTOR

DATE



No.	REVISIONS	DATE

**CITY OF WESTMINSTER**  
**DEPARTMENT OF PUBLIC WORKS**  
 STANDARDS FOR SIDEWALK & ENTRANCE CONSTRUCTION

**ENTRANCE RECONSTRUCTION**